



Electric Chain Hoists

Low Headroom Configuration


Type 28/06 E

HADEF Electric Chain Hoist combined with monorail trolley
Low headroom configuration

with push travel trolley Type 28/06 ER


with hand geared trolley Type 28/06 EH

with electric trolley Type 28/06 EE

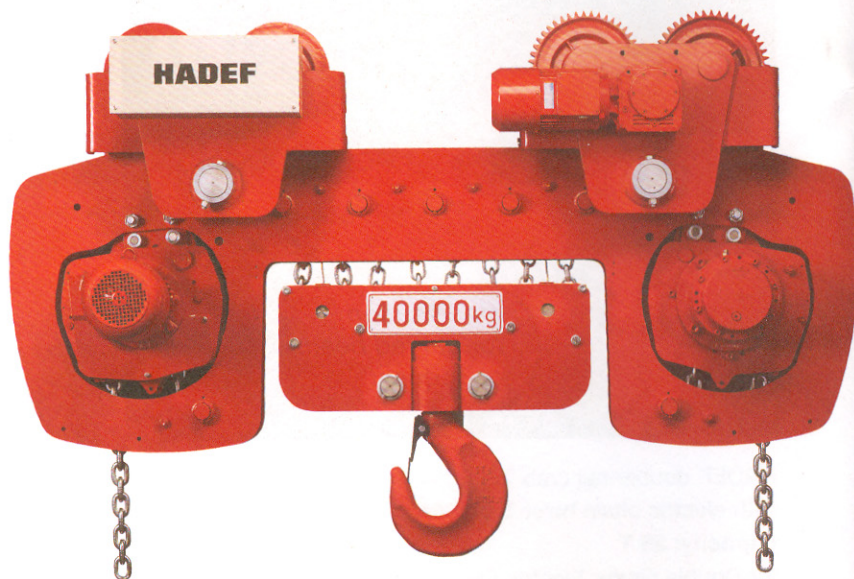

Type 28/06 EE
capacity 40 T/ 8 chain falls

*modification
for curved beam on
request*

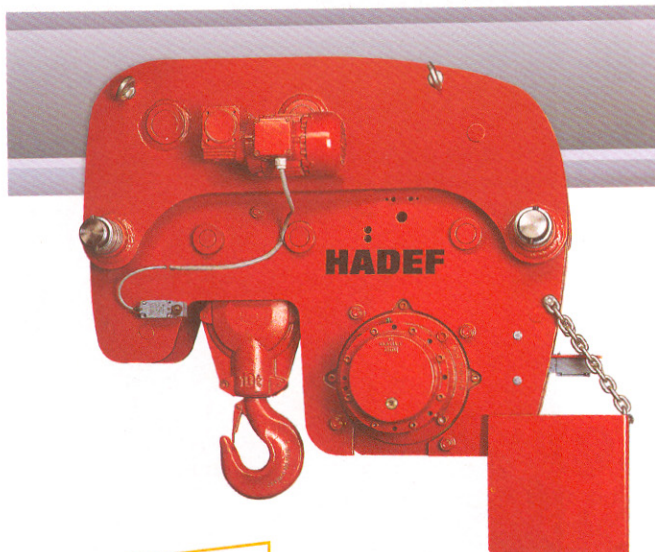

*Favourable for low
headroom purposes*

capacity W.L.L.	chain falls	hook to hook dimension	lifting speed main/ slow	FEM 9.511/ ISO 4301
kg	no.	mm	m/min	
500	1	285	9,0 / 2,2	2 m/ M5
1000	1	346	8,0 / 2,0	2 m/ M5
1600	1	464	11,0 / 2,6	2 m/ M5
2000	2	185	4,0 / 1,0	2 m/ M5
2500	2	213	5,5 / 1,3	2 m/ M5
3200	2	213	5,5 / 1,3	2 m/ M5
5000	2	(1)	4,0 / 1,0	2 m/ M5
5000	1	554	5,4 / 1,35	2 m/ M5
6300	1	554	5,4 / 1,35	1 Bm/ M3
6300	2	(1)	4,0 / 1,0	1 Bm/ M3
8000	2	305	2,8 / 0,7	2 m/ M5
10000	4	(1)	2,0 / 0,5	2 m/ M5
10000	2	360	2,8 / 0,7	2 m/ M5
12000	2	360	2,8 / 0,7	1 Bm/ M3
16000	4	407	1,4 / 0,3	1 Am/ M4
20000	4	487	1,4 / 0,3	1 Bm/ M3
25000	5	575	1,0 / 0,2	1 Bm/ M3
30000	6	575	1,0 / 0,2	1 Cm/ M2
40000	2 x 4	710	1,4 / 0,3	1 Bm/ M3
50000	2 x 5	730	1,1 / 0,27	1 Bm/ M3
60000	2 x 6	(1)	1,0 / 0,2	1 Bm/ M3

Note: electric trolleys with two travel speeds of 16/4 m/min,
other travel speeds on request

1) dimensions on request