



JFB 20 G

Load capacity: 2 x 10 t


Height: 180 mm

Art.-Nr. 10 202 140-V


- From JLB 20 up, pivoting cassettes and axles within the frame assure even pressure distribution across all castors and across the floor. No need for complex and expensive hydraulic compensation system.
- The double castor design results in dramatically easier steering due to reduced friction forces in curves. The much lower friction resistance also causes the trolleys on the rear axis to follow in a truer course.
- All transport trolleys are ready for use: the steerable transport trolley is fitted with a ball bearing supported turntable and a handlebar (as shown in picture). The adjustable-width transport trolley consists of two transport units and connecting bar.

Title	Unit	Data
Load capacity	kg	2 x 10000
Number of castors	pcs.	16
Castor dimensions Ø x Fitting length	mm	140 x 59
Height	mm	180
Supporting surface of turntable	mm	220 x 200
Cassette dimensions	mm	460 x 285
Connecting bar with joint	mm	2 x 1540
Cassettes adjustable from - to	mm	475 - 1300
Weight JUWATHAN® plus	kg	88


Technische Informationen

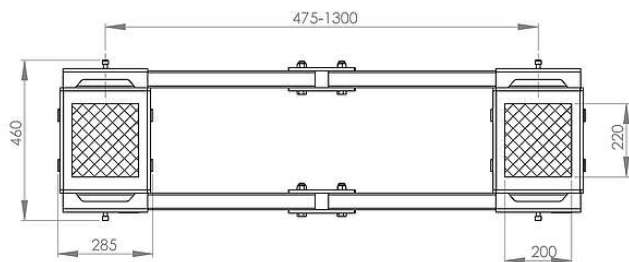

JFB 20 G | Bestell-Nr. 10 202 140-V | Draufsicht
JFB 20 G | Order No. 10 202 140-V | Top view



JFB 20 G | Bestell-Nr. 10 202 140-V | Frontansicht
JFB 20 G | Order No. 10 202 140-V | Front view



JFB 20 G | Bestell-Nr. 10 202 140-V | Seitenansicht
JFB 20 G | Order No. 10 202 140-V | Side view

