



JLB 3 K


Load capacity: 3 t

Height: 110 mm


Art.-Nr. 07 031 085-V

- Galvanized axles and safety clip rings for improved protection against corrosion.
- Equipped with highest quality castors as standard.
- Reduced weight due to advanced construction of load cassettes.
- All transport trolleys are ready for use: the steerable transport trolley is fitted with a ball bearing supported turntable and a handlebar.
- Non-marking support wheels.
- The K-series towing bars are also available with a removable handle. The removable handle is also available as a re-fitting set.
- Inspected according to technical regulation ANSI/ASME (USA)


Title	Unit	Data
Load capacity	kg	3000
Number of castors	pcs.	4
Castor dimensions Ø x Fitting length	mm	85 x 85
Height	mm	110
Supporting surface of turnable Ø	mm	150
Steerable Dimensions	mm	225 x 280
Handlebar with pulling eye	mm	990 (Deichsel ohne Zugöse)
Weight JUWATHAN® plus	kg	12



JLB 3 K | Bestell-Nr. 07 031 085-K | Draufsicht
JLB 3 K | Order No. 07 031 085-K | Top view



JLB 3 K | Bestell-Nr. 07 031 085-K | Frontansicht
JLB 3 K | Order No. 07 031 085-K | Front view

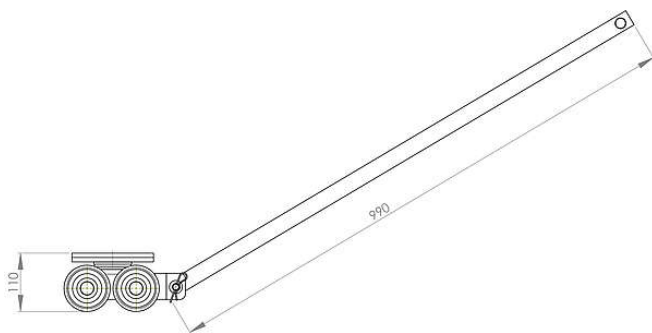

JLB 3 K | Bestell-Nr. 07 031 085-K | Seitenansicht
JLB 3 K | Order No. 07 031 085-K | Side view

