



JLB 6 K


Load capacity: 6 t

Height: 110 mm


Art.-Nr. 07 061 085-V

- Galvanized axles and safety clip rings for improved protection against corrosion.
- All transport trolleys are ready for use: the steerable transport trolley is fitted with a ball bearing supported turntable and a handlebar.
- Reduced weight due to advanced construction of load cassettes.
- Non-marking support wheels.
- The K-series towing bars are also available with a removable handle. The removable handle is also available as a re-fitting set.
- Inspected according to technical regulation ANSI/ASME (USA)


Title	Unit	Data
Load capacity	kg	6000
Number of castors	pcs.	8
Castor dimensions Ø x Fitting length	mm	85 x 85
Height	mm	110
Supporting surface of turnable Ø	mm	150
Steerable Dimensions	mm	445 x 590
Handlebar with pulling eye	mm	1120
Weight JUWATHAN® plus	kg	33



JLB 6 K | Bestell-Nr. 07 061 085-V | Draufsicht
JLB 6 K | Order No. 07 061 085-V | Top view

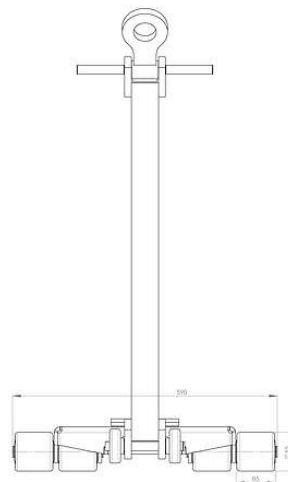

JLB 6 K | Bestell-Nr. 07 061 085-V | Frontansicht
JLB 6 K | Order No. 07 061 085-V | Front view

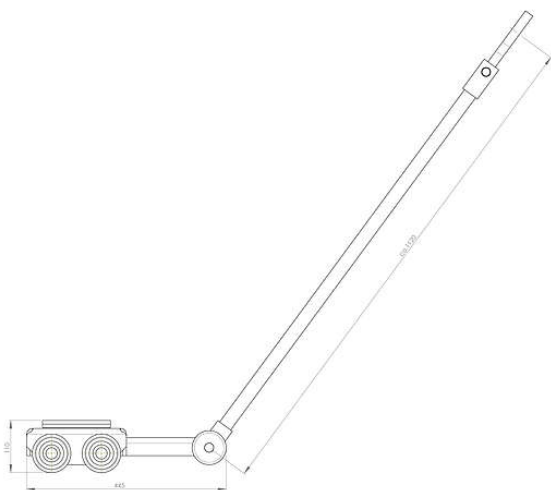

JLB 6 K | Bestell-Nr. 07 061 085-V | Seitenansicht
JLB 6 K | Order No. 07 061 085-V | Side view

